

LiliBend

DATE _____

PROJ. _____

FIRM _____

TYPE


SPECIFICATION INFORMATION

- Amber/ linear foot/ 305.4mm
- Cuttable increments 6" 152.4mm(6 LED's) with connectors for re connection
- Available for Indoor/Outdoor IP67
- Corrosion Resistant
- 590 Wavelength
- Patent Pending
- 3M Adhesive




MAX LUMENS: 107 LUMENS/ FOOT

Product Information

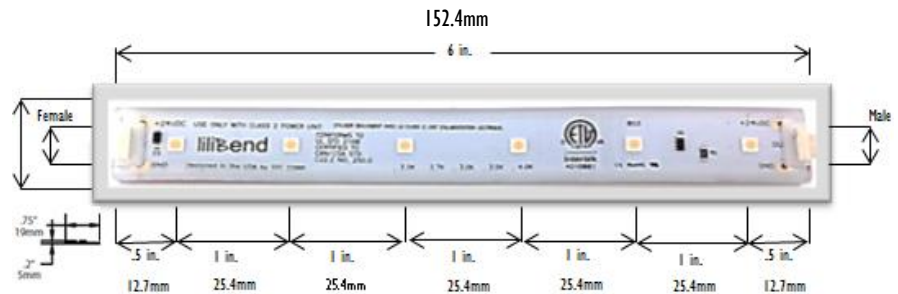

Item	Specification	
Output	LED Package	3535L midpower
	LEDs per foot	12x1" spacing
	Beams Angle	120°x120°
	Nanometers	590nm
	Efficacy	134 lm/W
	Lumen Maintenance**	50.000h L70@25°C 90.000h L50@25°C
	Input Voltage	24vdc Max.
	Power Consumption	4.4 Watts
Electrical	Current	200mAMPS
	Dimming	External Dimmable 24 VDC with Power Supply Unit
Control	Dimensions	12" x 0.759" x 0.375" (304.8mm x 19.5mm x 9.5mm)
Physical	Weight	.025lbs 10grams
	Temperature Ranges	(-35°C/-31°F to 50°C/122°F)Operating (-35°C/-31°F to 50°C/122°F)Startup (-35°C/-31°F to 50°C/122°F) Storage
	Humidity	0-95%, non-condensing
	100W Run Lengths	Max 20" Run (based on Class II Power Supply Unit)
	Certification	ETL/ Cetl CE
Certification & Safety	Environment	Dry/ Wet***/Damp Location

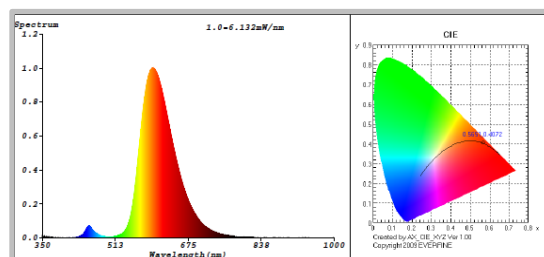

FIXTURES	
Model #	Description
LP-411	Amber, Silicone, potted with connector, 3M adhesive, 20ft/6m spool

Power Supply	
Model #	Description
PS-010	96W 0-10V Power Supply 110-220V
PS-048	48W MLV Power Supply 110-220V
PS-210	96W On/Off Power Supply 110-220V
PS-277	96W MLV Power Supply 277V
PS-288	288W MLV Power Supply 110-220V
PS-300	96W MLV Power Supply 110-220V

Profiles and Lenses	
Model #	Description
DL 400	Dome Lens Full Frost
FL 900	Flat Lens Semi Frost
MC-001	Mounting Channel without Lens
MC-045	45 degree Accessory Mount

Accessories	
Model #	Description
SC-001	Straight and Connector for reconnection 1"
SC-004	Corner and Straight Connector 4"
SC-012	Straight Connector 12"
SC-072	Straight Connector 72"
IC-012	Initiating Cable 72"
YC-100	Y Connector
SK-001	Sealing Kit for Wet Location
CT-200	Cutting Tool
MC-000	Mounting Clips