

Wall Mounting Landscape Light



■ LED Colour Temperature

- 3000K
- 6000K

■ Optics




R3
R0115C061HM 25°

R3




25°

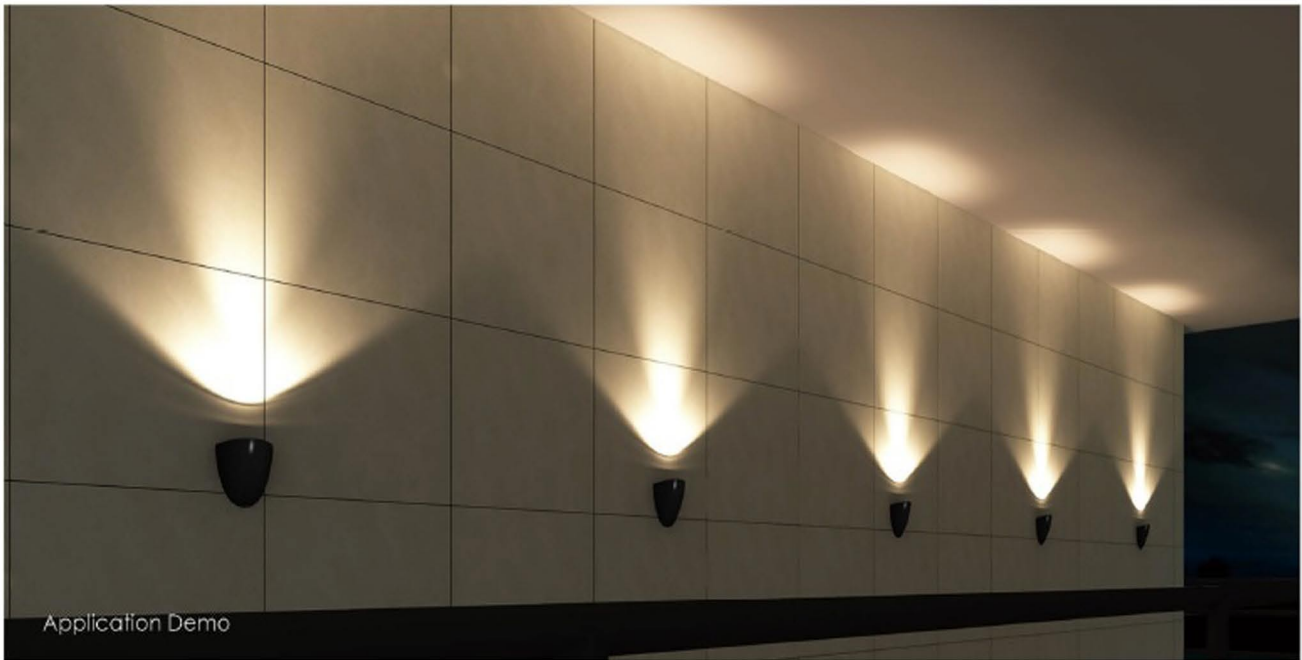

Application Demo

Outer Dimensions


Unit:mm

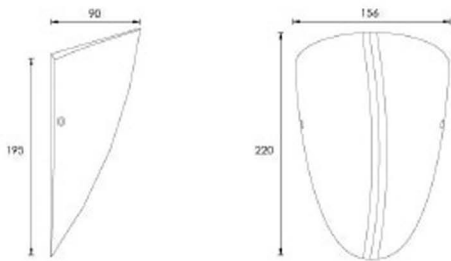

Material specifications




Housing	12 [#] Die-casting dark grey powder coated aluminum. T=60-80μm.Adhesion of ISO class 1/ASTM class 4B
Front cover	12 [#] Die-casting aluminum
Light Window	Tempered glass,T=3.5mm
LED	NICHIA
LED driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power cable	H05RN-F 2X1.0mm ² L=0.3m(low voltage) H05RN-F 3X1.0mm ² L=0.3m(High voltage)

Housing color option



Sanded Brown RAL 8019	Sanded Black RAL 9005	Silver Resistant Paint RAL 9006

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
R7BC0129	1×12W COB	R3	25°	24V DC 120/240	24V = 576 120V = 112 240V = 64	24V = 13.8 120V = 14.0 240V = 14.1	Cool white =834 Warm white =809	05

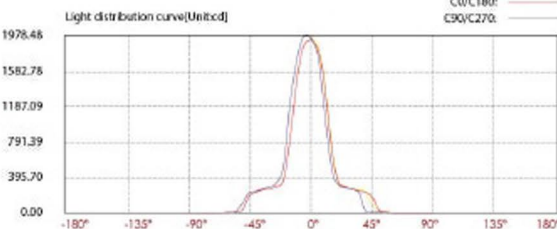

Illuminance at a distance			
Center beam LUX	Beam width	V	H
2m 485.15 LUX	1.0m	1.0m	
4m 121.29 LUX	2.0m	1.9m	
6m 53.01 LUX	3.0m	2.9m	
8m 30.22 LUX	4.0m	3.8m	
10m 19.41 LUX	5.0m	4.8m	
12m 13.48 LUX	6.0m	5.7m	

Ver.Spread 28.0 Horiz.Spread 26.9

For more photometric data , please access Kapego website www.kapego.com