





**RGBW** 

The ARCHIBAR SL200 it has the same shape and design of the ARCHIBAR SL300 but with less powerful LEDs.

Suitable for applications where the objet to lit isn't higher then 15 meters.

Available in RBGW/FC and also in MONOCHROMATIC light source and WHITE BALANCE.

Available in 4 different measures
• Standard 90 cm. • On request 60 - 120 - 150 cm

• Standard fixture colour finishing is grey. Optional black and white (art. FX-COLOUR).

## **TECHNICAL SPECIFICATION**

SOURCE

n. 15 RGBW-FC-LEDs Total out lumen: R 1050lm, G 1755lm, B 300lm, W 2250lm Total light power: 100W

OPTIC

15°x30° (38 mm lenses)

On request: narrow, wide (38 mm lenses)

• TILT

Manual 160°

CONTROL

Standard interface: RS-485 Protocol: USITT DMX 512

CONNECTIONS

Signal: 4pin IP 67 connector (male-female) possibility to link up to 32 devices in chain Available as accessories:

- Wireless DMX receiver

Main Power: 3pin IP 67 connector (male-female) possibility to link up to 8 devices at 230V or 4 devices at 120V in chain.

SAFETY

n. 2 eyebolts for safety chains

SETUP AND CONFIGURATION

Control panel with touch technology and led display with flip function or by DRS (remote control device) Dedicated DMX channel for white balance DMX or Auto mode with Master-Slave function Intelligent temperature control Halogen simulation CYM simulation Flicker-free function Smooth dimming function

IP 67 RATING PROTECTION

POWER SUPPLY

Voltage range: 100-240VAC Frequency range: 47-63Hz Active Power factor: PF>0.94/230VAC, PF>0.98/120VAC Current: 0.50A@230VAC, 0.9A@120V Power: 105W


Fuse T3,15A (inside fixture)

• DMX CHANNELS

9CH mode, 6CH mode, 5CH mode, 4CH mode

PHYSICAL

WxDxH: 928 x110x93 mm (dimension of profile) Weight: 6 Kg.




. . . . . . . . . .



link to the website page

## Studio Due

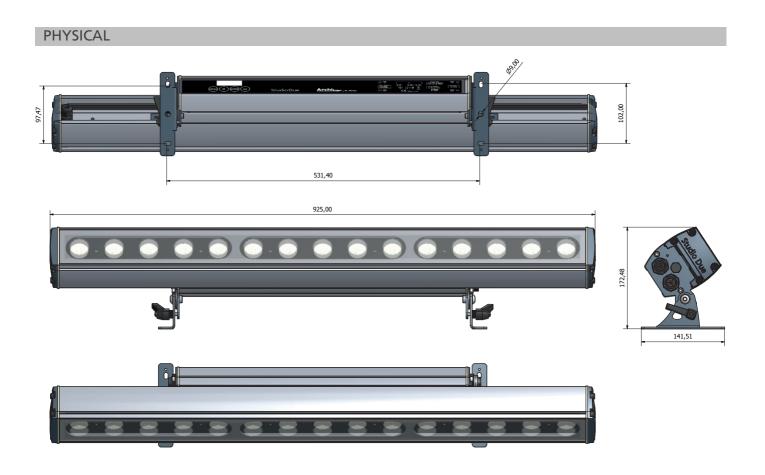



© Copyright 2014 **Studio Due light** srl Strada Poggino, 100 01100 Viterbo (Italy) tel. +39.0761.352520 (4 lines) fax +39.0761.352653 C.F. e P. IVA 05793121004