



art. 1519
ARCHIBAR SL300 RGBW/FC

Studio Due

emotion and creativity in light



Archibar SL 300/FC

RGBW

Top product within Archibar series, is the ARCHIBAR SL300 RGBW/FC equipped with high powerful LEDs. Robust and reliable case, the new luminaire, IP67 rated is suitable for architectural and entertainment applications. It has a modern and appealing style which reflect the Italian design

Available in 4 different measures:

- Standard 90 cm.
- On request 60 - 120 - 150 cm
- Standard fixture colour finishing is grey. Optional black and white (art. FX-COLOUR).

TECHNICAL FEATURES (90cm standard)

• SOURCE

n. 15 RGBW-FC-LEDs
Total out lumen:
R 1350lm, G 2250lm, B 450lm, W 3300lm

Total light power: 140W

• OPTIC

25° (45 mm lenses)
On request: narrow, wide, elliptic 45 mm lenses

• TILT

Manual 160°

• CONTROL

Standard interface: RS-485
Protocol: USITT DMX 512

• CONNECTIONS

Signal: 4pin IP 67 connector (male-female)
possibility to link up to 32 devices in chain
Available as accessories:
- Wireless DMX receiver
Main Power: 3pin IP 67 connector (male-female)
possibility to link up to 6 devices at 230V or
3 devices at 120V in chain.

• SAFETY

n. 2 eyebolts for safety chains

• SETUP AND CONFIGURATION

Control panel with touch technology and led display
with flip function
or by DRS (remote control device)
Dedicated DMX channel for white balance
DMX or Auto mode with Master-Slave function
Intelligent temperature control
Halogen simulation
CYM simulation
Flicker-free function
Smooth dimming function

• IP 67 RATING PROTECTION

• POWER SUPPLY

Voltage range: 100-240VAC
Frequency range: 47-63Hz
Active Power factor:
PF>0.94/230VAC, PF>0.98/120VAC
Current:
0.70A@230VAC, 1.25A@120V

Power: 150W

Fuse T5A (inside fixture)

• DMX CHANNELS

9CH mode, 6CH mode, 5CH mode, 4CH mode

• PHYSICAL

WxDxH: 928 x110x93 mm (dimension of profile)
Weight: 6,7 Kg.




link to the website page

Studio Due

emotion and creativity in light

PHYSICAL

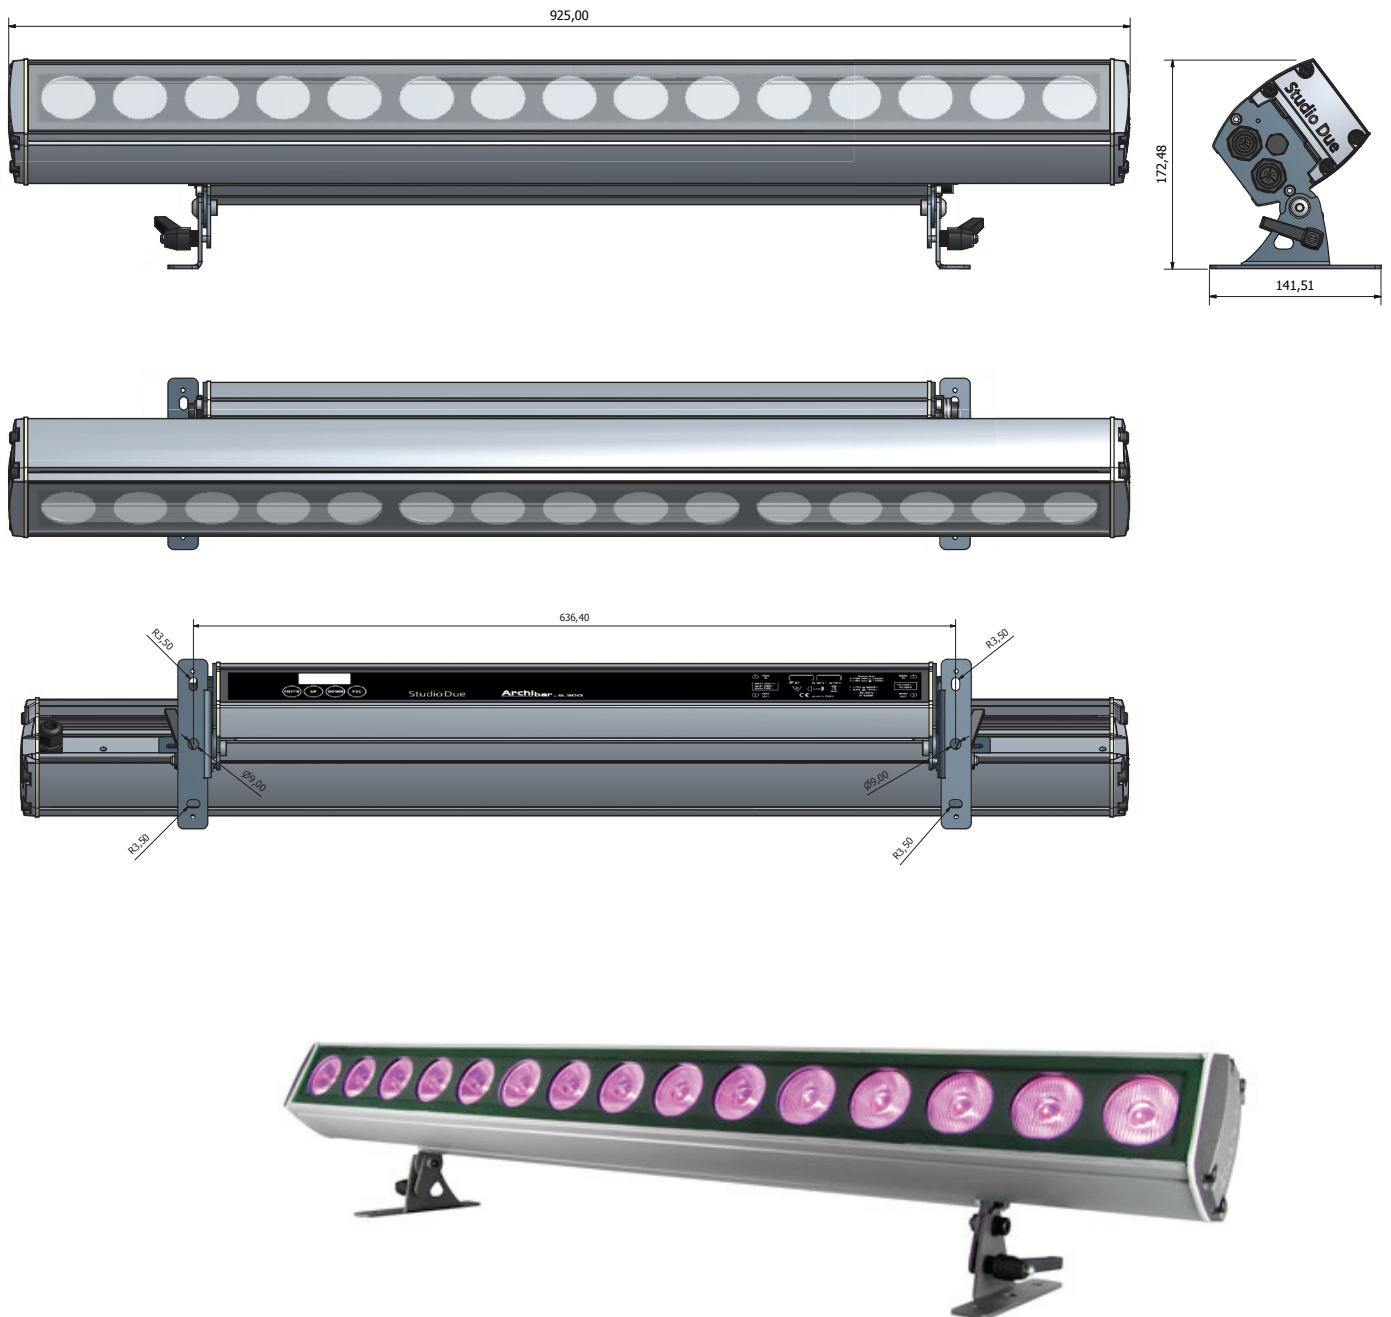

© Copyright 2014 Studio Due light srl
Strada Poggino, 100
01100 Viterbo (Italy)
tel. +39.0761.352520 (4 lines)
fax +39.0761.352653
C.F. e P. IVA 05793121004