

Recessed LED Stair Light & Wall light

LED Colour Temperature



- 2000K
- 3000K
- 6000K

Optics

- N/A

Outer Dimensions

Unit:mm



Mounting sleeve 074F

Material specifications

Housing & Front cover	12° Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Light Window	PC T=3mm
Cable gland	IP68 PG-9 PA66
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C-40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 074F
Dimmable support	Triac PWM 1-10V Dali

Front Cover Color Option

— Basic

Sanded Dark Grey
KAP 7037

— Secondary

Silver Resistant Paint
RAL 9006


Sanded Black
RAL9005

Mounting sleeve characteristic



•The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
•Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D18B5407	54xSMD2835	24V DC 120/240	24V = 220 120V = 95 240V = 53	24V = 5.3 120V = 6.4 240V = 6.8	Cool white =47 Warm white =44	09

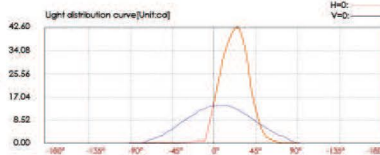

Beam width	Beam height
2m	3.84 LUX
4m	0.96 LUX
6m	0.43 LUX
8m	0.34 LUX
10m	0.23 LUX
12m	0.11 LUX

Var.Spread:77.6
Half.Spread:39.3