

PCLED 450



High intensity planoconvex fixture with 450W COB LED 3200K or 5600K for professional use in large theatres, TV studios, concerts, etc.



TECHNICAL SPECIFICATIONS



ENTERTAINMENT



ARCHITECTURAL



GREENLINE

- | | |
|---|---|
| <input type="checkbox"/> Halogen, Mains | <input checked="" type="checkbox"/> LED White |
| <input type="checkbox"/> Halogen, Low Voltage | <input type="checkbox"/> LED Tunable White |
| <input type="checkbox"/> Discharge | <input type="checkbox"/> LED RGB |
| | <input type="checkbox"/> LED RGBW |

PCLED 450

The light output of this fixture is equivalent to one of a 2000-2500W halogen lamp but with a life of 30.000 hours and the use of only of 450W.

All the world is a stage.

PCLED 450

Housing made of strong aluminium die-cast structure with excellent ventilation for the best heat dissipation.



Low installation cost:

- ✓ smaller general power boards and size on the mains lines
- ✓ no external dimmers. The fixture is directly dimmable through local control panel or through external DMX
- ✓ no dedicated power lines: just one line can power several units thanks also to "in and out" Powercon connectors

Low maintenance costs:

- ✓ smaller energy bill
- ✓ no costs for lamp purchase and replacement
- ✓ longer life of colour filters

Other important features are:

- ✓ perfect dimming from 0 to full
- ✓ Adjustable refresh frequency for a use without flickering if used with TV cameras.
- ✓ Adjustable fan for silent mode
- ✓ Adjustable strobe speed
- ✓ RDM function for the remote control of all the above functions from light board or PC


OPTIONS

- Pole operated yoke version
- DMX motorised yoke version

ACCESSORIES


- Colour filter frame 168x168 mm
- 4 leaf barn doors
- DMX scroller colour changer
- Hook clamps for 30 - 50 mm. trusses
- Safety rope with spring hook

DIMENSIONS (mm)

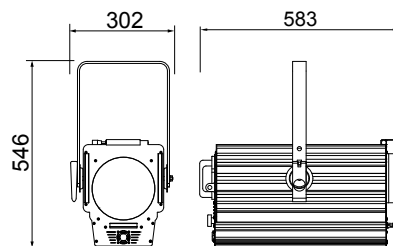


PHOTOMETRIC DATA (*) Warm White version

Lux	107.978	26.994	11.998	6.749	4.319
∅ (m)	0,3	0,6	0,9	1,3	1,6

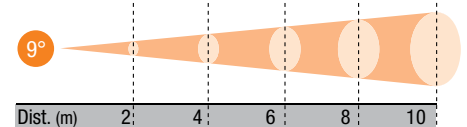

Lux	8.888	2.222	988	555	356
∅ (m)	2,8	5,6	8,4	11,2	14,0

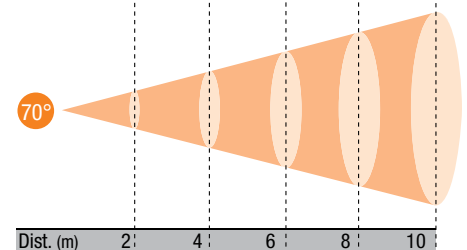

(*) (performance according to LED available on July 2015)

ELECTRICAL SPECIFICATIONS

500W, 100-240V, 50/60Hz

Spotlight Srl - Via Sardegna 3 - 20098 - S. Giuliano Milanese - Milano - Italy
Tel. +39 02 98 83 055 - Fax +39 02 98 83 056 - sales@spotlight.it - www.spotlight.it

 certified quality management system ISO 9001:2008