





Wall Mounting Landscape Light



R7BA0128

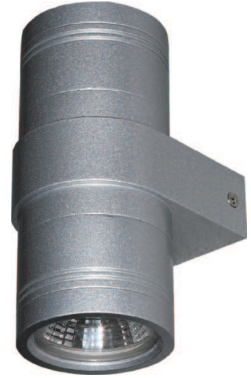


R7BB0227

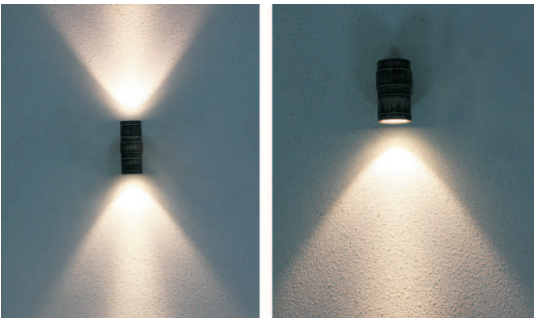

Sanded Brown RAL 8019	Sanded Black RAL 9005	Silver Resistant Paint RAL 9006
		

Unit:mm

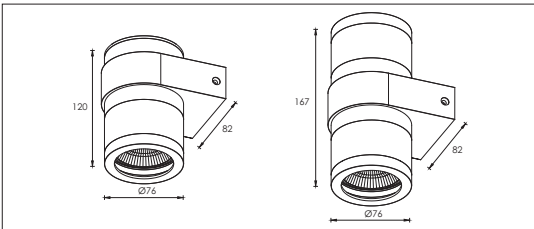

Material specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Lens	Optical reflector, efficiency≥85%
Glass	Tempered glass.T=6mm
LED Driver	Constant Voltage Input,Constant Current Output
LED	COB LED 8W
Operating temperature	-20°C~40°C

Item	Light source	Reflector	Lens degree selected by manufacturer(θ1/2)	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)
R7BA0128	1×10W COB	R8	24	24VDC 120/240	24V =480 120V=107 240V= 60	24V =11.5 120V=12.6 240V=12.6	Cool white=932 Warm white=845
R7BB0227	2×8W COB	R8	24	24VDC 120/240	24V =822 120V=182 240V=103	24V =19.7 120V=21.0 240V=21.0	Cool white=932×2 Warm white=845×2