





Profile Spotlight Series



SPECIFICATIONS

The Source Four® LED Fresnel adapter uses all the power and beauty of the Source Four LED light engine to create an astounding beam light suitable for any stage or studio. With ETC's unique interface, you can quickly turn your Source Four LED into a powerful, controllable Fresnel. With the addition of this accessory, your Source Four LED will always be the right fixture for the job.

PHYSICAL

- Rugged, die-cast, aluminum construction
- Fits all standard Source Four LED light engines
 - *Not for use with HPL Source Four fixtures*
- Compatible with ETL and CE fixtures
- Quick and easy operation
- Compact optics
- Single-handed accessory-slot access
- Simple setup
- · Available in black only

OPTICAL

- Bright, smooth washlight
- Maximum color control with ETC's x7 Color System™
- 15-50 degree zoom
- Barn-door beam shaping
- Heat- and impact-resistant polycarbonate lenses

ORDERING INFORMATION

Source Four LED Fresnel

| MODEL | DESCRIPTION | |
|-----------|---------------------------------|--|
| S4LEDFRES | Source Four LED Fresnel Adapter | |

For a complete fixture, order the Source Four LED fixture body in addition to the Fresnel adapter.


Accessories

| MODEL | DESCRIPTION |
|---------|--------------|
| 400BD | Barn Door |
| 400PTH3 | Top hat, 3in |
| 400PTH6 | Top hat, 6in |
| 400PHH | Half hat |

Source Four products are protected by one or more of the following patents:

| U.S. | USRE36,3316, US5,345,371, US6,092,914 and US5,775,799 |
|---------|---|
| U.K. | GB0592589, GB0673488, 99930527.9* |
| Germany | DE0592589, GB0673488, 99930527.9* |
| Japan | JP2,501,772 |

^{*} European patent application number



Profile Spotlight Series


PHOTOMETRICS

For photometry data, please view the Source Four LED Photometry Guide, which can be found at www.etcconnect.com.

PHYSICAL

Source Four LED Fresnel Weights

| MODEL | WEIGHT | | SHIPPING WEIGHT | |
|-------------------------|--------|-----|-----------------|-----|
| | lbs | kgs | lbs | kgs |
| Source Four LED Fresnel | 9.2 | 4.2 | 10.8 | 4.9 |

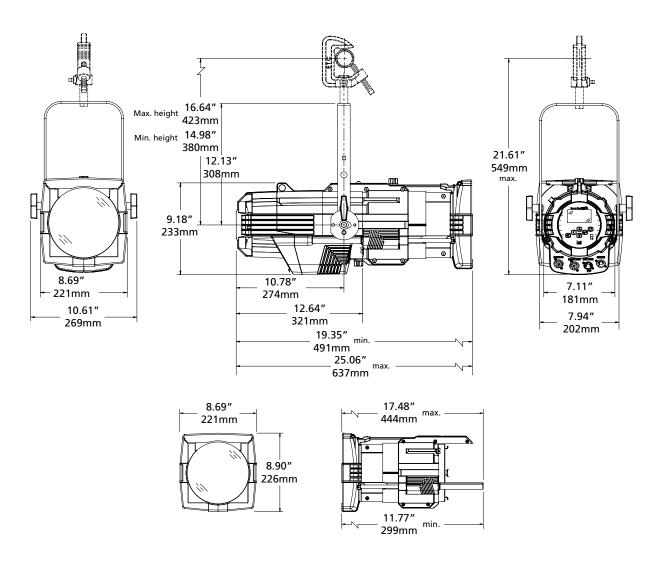



Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736 London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0)20 8896 1000 • Fax +44 (0)20 8896 2000 Rome, IT • Via Pieve Torina, 48, 00156 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +44 (0)20 8752 8486 Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00

Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325 Web • www.etcconnect.com • Copyright©2015 ETC. All Rights Reserved. All product information and specifications subject to change. 7460L1012 Rev. B Printed in USA 08/15