




Cambered Front Lid Inground and Up Light

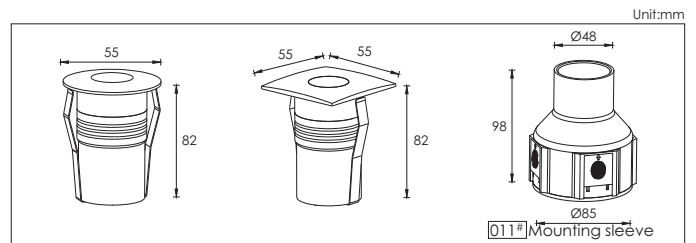

Material specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80μm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated stainless steel SUS 316#
Glass	Step tempered glass.T=7mm
Glass pressure capacity	Full area=1704kgs
Gasket	Molding shaped silicone seal
Lens	Optical lens.efficiency≥85%
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m(low voltage) H05RN-F 3X1.0mm ² L=0.5m(high voltage) H05RN-F 4X0.75mm ² L=0.5m(for RGB)
Mounting sleeve	ABS 011#

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
○ B2WCR0157 □ B2WCS0157	1 × 2W	B33D	20°	24V DC 120/240	2.4 V=110 120V= 48 240V= 28	2.4 V=2.6 120V=3.0 240V=3.1	Cool white=130 Warm white=110	08
○ B2WCR0118 □ B2WCS0118	1 × 2W RGB 3in1 Full color	B34D	30°	24V DC	R = 38 G = 53 B = 54	3.5	56	08