



Wall Mounting Landscape Light

Double side

LED Colour Temperature

- 2000K
- 3000K
- 6000K


Optics

N/A



Outer Dimensions


Unit:mm






Material specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Light Window	PC T=6mm
Gasket	Tooling shaped seal
Driver	Main voltage 100V-240V driver inside builded
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2×1.0mm ² L=0.3m (low voltage) H05RN-F 3×1.0mm ² L=0.3m (high voltage)

Housing color option



Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D7AD0237	2×3W NICHIA	—	—	24V DC 120/240	24V = 268 120V = 73 240V = 42	24V = 6.20 120V = 8.50 240V = 8.60	—	06

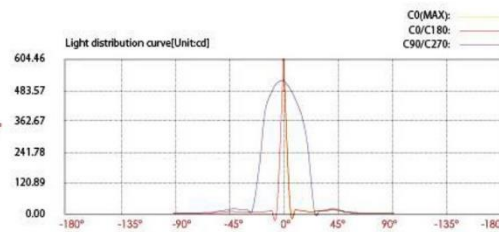

Illuminance at a distance		
Center beam LUX	beam width V	beam width H
2m 151.11 LUX	1.4m	0.2m
4m 37.78 LUX	2.7m	0.4m
6m 16.79 LUX	4.1m	0.6m
8m 9.44 LUX	5.5m	0.8m
10m 6.04 LUX	6.9m	1.0m
12m 4.20 LUX	8.2m	1.2m

Ver.Spread:37.9 Horiz.Spread:5.9

For more photometric data , please access Kapego website