

## MINI SWITCH

The perfect lighting tool for the nomadic, quality conscience technician. The MINI Switch is a super lightweight and portable panel which can be used anywhere and everywhere. The MINI Switch, designed for versatility.

Reference code	MINI-HL-SW
Light Panel Dimensions	585 x 200 x 20mm 23 x 7.8 x 0.8 "
Max Power Consumption	85 Watts
Light Panel Voltage Input / Max Load	24VDC / 3.5Amps
Weight	1.7 kg 3.7 lb
Dimming Curve	Flicker Free at Any FPS - 0 to 100% (2 speeds)
AC Power	100-240 VAC
Battery Connection	V - Mount or Gold Mount Plate
Battery DC input Voltage Range	10 to 36VDC
Type of LEDs	SMD2835
Number of LEDs	1092
Colour Temperature Range	3000 to 5600°k
CRI	94% @3200°k - 96% @5600°k
TLCI-II	91% @3200°k - 94% @5600°k
Diffusion	Frosted Acrylic Diffuser
Standard Mounting	Standard Mount - The K1 single ball
Light Panel Power Connector	4pin Over Moulded Connector (proprietary)
Housing Material	Black Anodised Aluminium and Stainless Steel Screws
Silent Cooling	Passive Cooling Technology - No Fins, No Fans
IP Rating	20
Certifications	CE, CSA, RoHS

## PHOTOMETRICS

METRES	0.5	1	1.5	2	2.5	3
@3200°K Lux	4375	1510	760	460	318	239
@5600°K Lux	4786	1593	729	453	322	230

FEET	2	4	6	8	10	12
@3200°K FC	317	106	51	31	22	16
@5600°K FC	341	109	50	31	21	16



## POWER - MINI CT

Basic DC Driver for MINI Switch. Mounts directly onto the back of the light panel with spring loaded system. Chogori input connector and over moulded 4-pin output connector.

Reference code	MINI - CT
Size	150 x 100 x 40 mm 5.9 x 3.9 x 1.8 "
Weight	0.7 kg 1.5 lb
Dimming curve	Flicker Free at Any FPS 0 to 100% (2 speeds)
Input / Output Voltage	12 to 30 VDC / 24VDC Constant Current
Colour Temperature Range	3000 to 5600°k
Housing Material	Black Anodised Aluminium and Stainless Steel Screws
IP Rating	20
Certifications	CE, CSA, RoHS



## POWER - VLOCK OR ANTON BAUER


Mounting plate which welcomes V or gold mounted batteries. Chogori output connector. Fits directly onto the back of the MINI-CT with spring loaded screws or can be carried using the shoulder strap.

Reference code	MINI - VL or MINI - AB
Size	140 x 85 x 27cm 5.5 x 3.3 x 1 "
Weight	0.3 kg 0.7 lb
Housing Material	Black Anodised Aluminium and Stainless Steel Screws
Certifications	CE, CSA, RoHS

## POWER - EXTERNAL POWER SUPPLY FOR MINI

External and universal power supply and its mounting plate - mounts on the back of the light. Standard AC power plug and Chogori output connector

Reference code	MINI - EPS
Size	170 x 60 w 40mm 6.7 x 2.4 x 1.8 "
Weight	0.9 kg 2 lb
Max power draw	85W
Input / Output Voltage	100 to 240 VAC / 24VDC
Housing Material	Plastic Housing and Steel Mounting Plate
Certifications DMX Power Box	CE, CSA, RoHS

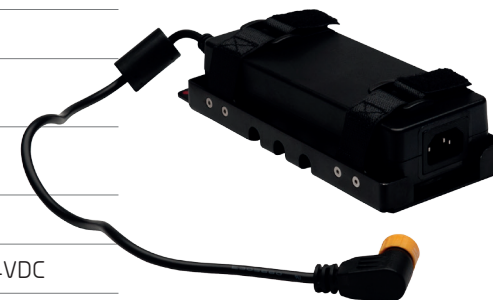

## POWER - UBB

Advanced DC driver with DMX wired and wireless function (Lumen Radio FX chip) and WiFi / Lan input Coloured control screen and Chogori input connector. Mounts directly onto the back of the light panel with spring loaded system. Suitable for MINI and SL1 Switch.



Reference code	UBB - DMX
Size	210 x 125 x 60 mm 8.2 x 4.7 x 2.3 "
Weight	1.25 kg 2.7 lb
Dimming curve	Flicker Free at Any FPS 0 to 100% (2 speeds)
Input / Output Voltage	12 to 30 VDC / 24VDC Constant Current
Colour Temperature Range	3000 to 5600°k
Housing Material	Black Anodised Aluminium and Stainless Steel Screws
IP Rating	20
Suitable For	SL1 Switch / Mini Switch
Certifications	CE, CSA, RoHS