

LiliBend

DATE _____

PROJ. _____

FIRM _____


TYPE

SPECIFICATION INFORMATION

- 2.2W/ linear ft/304.8mm
- Cuttable increments 6" /152.4mm (6 LED's) with connectors for re connection
- <3 Mc Adam
- 90+ CRI (2700K and 3000K)
- Available for Indoor/Outdoor IP67
- Patent Pending
- Current Regulated for Long Life
- 3M Adhesive




MAX LUMENS: 225 LUMENS/ FOOT

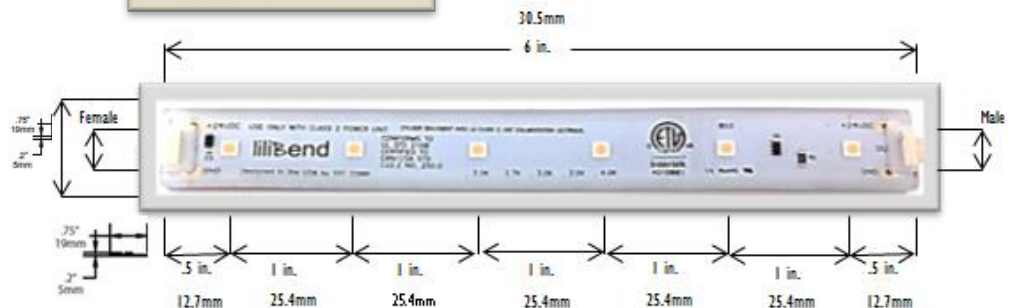

Product Information

Item	Specification	2200K	2700K	3000K	3500K	4000K
Output	LED Package	Lumiled 3535L				
	LEDs per foot	12 x .1" spacing				
	Beams Angle	120° x 120°				
	Lumens*	191 lm/ft	202 lm/ft	215 lm/ft	222 lm/ft	225 lm/ft
	Efficacy	86 lm/W	95 lm/W	96 lm/W	99 lm/W	102 lm/W
	CRI	84	90	91	86	85
	R9	NA	33	37	24	23
	Lumen Maintenance**	50.000h L70@25°C 90.000h L50@25°C	50.000h L70@25°C 90.000h L50@25°C	50.000h L70@25°C 90.000h L50@25°C	50.000h L70@25°C 90.000h L50@25°C	50.000h L70@25°C 90.000h L50@25°C
	Input Voltage	24VDC Max.				
Electrical	Power Consumption	2.2W/foot				
	Current	100mA/foot				
Control	Dimming	External Dimmable 24VDC With Power Supply Unit				
Physical	Dimensions	12 x .75 x 0.2 in (305.5 x 19 x 5 mm)				
	Weight	0.025 lbs (10 g)				
	Temperature Ranges	(-35°C/-31°F to 50°C/122°F)Operating (-35°C/-31°F to 50°C/122°F)Startup (-35°C/-31°F to 50°C/122°F)Storage				
	Humidity	0-95%, non-condensing				
	96W Lengths	Max 40' Run (based on Class II Power Supply Unit)				
Certification & Safety	Certification	ETL/ Cetl, CE				
	Environment	Dry/ Wet**/ Damp Location				

Binning

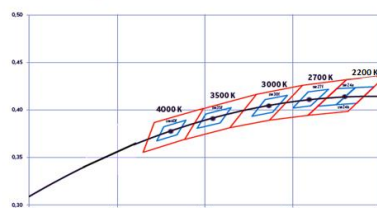

FIXTURES	
Model #	Description
LP-222	2.2W, 2200K, Silicone, potted with connector, 3M adhesive, 20ft/6m spool
LP-227	2.2W, 2700K, Silicone, potted with connector, 3M adhesive, 20ft/6m spool
LP-230	2.2W, 3000K, Silicone, potted with connector, 3M adhesive, 20ft/6m spool
LP-235	2.2W, 3500K, Silicone, potted with connector, 3M adhesive, 20ft/6m spool
LP-240	2.2W, 4000K, Silicone, potted with connector, 3M adhesive, 20ft/6m spool
XT-435	2.2W 3500K, Silicone, Potted with Connector, 3M adhesive, 20ft/6m spool

Power Supply	
Model #	Description
PS-010	96W 0-10V Power Supply 110-220V
PS-048	48W MLV Power Supply 110-220V
PS-210	96W On/Off Power Supply 110-220V
PS-277	96W MLV Power Supply 277V
PS-288	288W MLV Power Supply 110-220V
PS-300	96W MLV Power Supply 110-220V

Profiles and Lenses	
Model #	Description
DL 400	Dome Lens Full Frost
FL 900	Flat Lens Semi Frost
MC-001	Mounting Channel without Lens
MC-045	45 degree Accessory Mount

Accessories	
Model #	Description
SC-001	Straight and Connector for reconnection 1"
SC-004	Corner and Straight Connector 4"
SC-012	Straight Connector 12"
SC-072	Straight Connector 72"
IC-012	Initiating Cable 72"
YC-100	Y Connector
SK-001	Sealing Kit for Wet Location
CT-200	Cutting Tool
MC-000	Mounting Clips