פנס חכם מבוסס לד
Robe - IFORTE

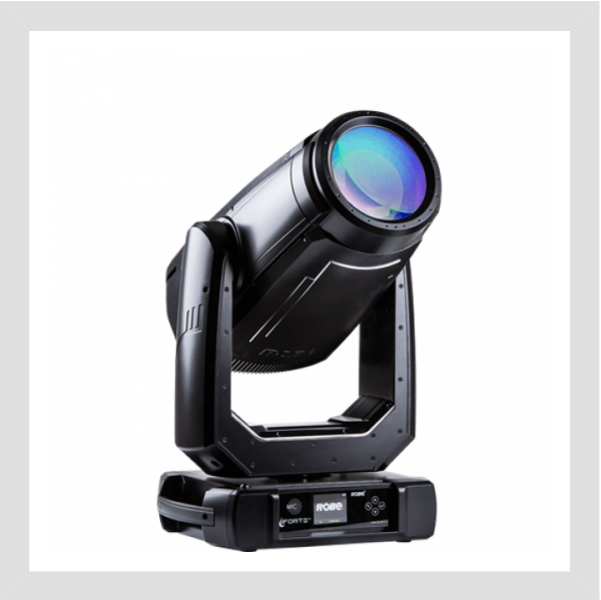

אפילו החזקים צריכים את ההגנה הנכונה! ה-IFORTE החדש מבית חברת Robe, מצטרף לסדרת הפנסים מוגני המים IBAR, IBEAM 250, ISPIIDER ו- IPARFECT.

עם מנוע לד TE בעוצמה של 1000W, מערכת זום של 5.5° עד 55° ופלט אור חזק במיוחד.

צבעי CMY, ו-CTO בצורה חלקה במיוחד, המאפשרת עדינות צבע מלאה. 2 גלגלי גובואים, גלגל אניציה, פריזמה 6 עגולה ולינארית, שאטרים, ועוד...

מפרט טכני

כללי

יצרן: Robe

צבע גוף: Black

חשמל

מתח עבודה: 100-240V, 50-60Hz

הספק כולל: 1250W

מקור אור

סוג נורה: TE™ 1.000W iSE HP White LED Engine (Patented) | TE™ 1.000W iSE HCF White LED Engine (Patented)

עוצמת הארה: 113,000lx @ 5m | 78,000lx @ 5m

אורך חיי נורה: 50,000h

CRI: 70, remotely selectable filters for CRI 80 and CRI 90

זוית פיזור: 55°-5°

מידות

רוחב: 480mm

גובה: 856mm

עומק: 335mm

משקל: 42.5Kg

שליטה

שליטה: USITT DMX-512, RDM, ArtNet, MA Net, MA Net2, sACN

שליטה אלחוטית: Wireless CRMX™ technology from Lumen Radio

מצבי הפעלה 54channels **DMX:**

דימר: 16 bit (internal 18 bit)

סביבת עבודה

דירוג IP: IP65

פרמטרים Moving Light

איריס: Motorized, stepless, pulse effects up to 3 Hz

פרוסט: MagFrost™ - magnetic paddle fast change system providing exchangeable frosts containing as standard a very light 1° for instant softening of the projected gobo or framing shutters, and a medium 5° for even wash, both specifically selected for theatre and TV use

פוקוס: Motorized zoom and focus

Zoom: 5°-55°

CMY / RGBW: Cyan: 0 - 100% | Magenta: 0 - 100% | Yellow: 0 - 100%# Variable CTO: 3.000K - 6.700K

גלגל גובו 1: 6 rotating, indexable and replaceable breakup and aerial gobos + open, patented slot & lock system

גלגל גובו 2: 6 rotating, indexable and replaceable breakup and aerial gobos + open, patented slot & lock system

גלגל צבע 1: 5 fixed dichroic colours+ white

גלגל צבע 2: 5 fixed dichroic colours + white

פריזמה: Prism 1: Independent 6 facet linear prism rotating in both directions at variable speed | Prism 2: Independent 6 facet circular prism rotating in both directions at variable speed

גלגל אנימציה: Aluminium animation wheel, used alone or in combination with gobos, rotating in both directions at variable speed

שאטר: Patented Plano4™ framing shutters module with 4 individually positionable blades plus rotation of

the complete frame system + - 60

סטרוב: Electronic strobe effect with variable speed up to 20 Hz, pre-programmed random strobe & pulse effects

תנועה: Pan movement: 540°# Tilt movement: 270°# Movement control: Standard and Speed# Controllable speed of Pan & Tilt movement# EMS™: Electronic Motion Stabilizer system for Pan & Tilt reducing beam deviation caused by truss movement or vibration (Patented)# Automatic Pan & Tilt position (correction# MAPS™ - Motionless absolute positioning system for Pan and Tilt (Patent pending

(**HOTSPOT:** From flat field to 6:1 hot-spot (optional

קבצים להורדה

דף מידע ROBE
((901.29 kB