

Double side



## Wall Mounting Landscape Light


LED Colour Temperature    Optics

- 2000K
- 3000K
- 6000K

N/A

### Outer Dimensions

Unit:mm



### Material specifications




Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Light Window	PC T=6mm
Gasket	Tooling shaped seal
Driver	Main voltage 100V-240V driver inside builded
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2×1.0mm <sup>2</sup> L=0.3m(low voltage) H05RN-F 3×1.0mm <sup>2</sup> L=0.3m(high voltage)



### Housing color option



Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D7AC0237	2×3W NICHIA	—	—	24VDC 120/240	24V = 268 120V = 73 240V = 42	24V = 6.20 120V = 8.50 240V = 8.60	—	06

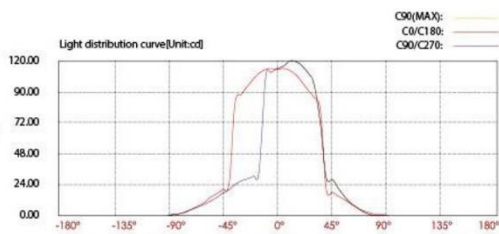

Center beam LUX	Beam width V	H
2m 28.35 LUX	1.8m	3.0m
4m 7.09 LUX	3.7m	6.0m
6m 3.15 LUX	5.5m	9.0m
8m 1.77 LUX	7.4m	12.0m
10m 1.13 LUX	9.2m	15.0m
12m 0.79 LUX	11.1m	18.0m

VerSpread:49.5    Horiz.Spread:73.8